

Note: These shop drawings are based on our best guess at clarifying discrepancies in the architectural drawings using provided dimensions, scaling, and choosing the most probable solution. Dimensional preference was given to the structural drawings except when there were conflicts with finishes. Elevations have been scaled. Contractor and architect to verify ALL dimensions. VTW WILL ASSUME NO LIABILITY FOR WRONG DIMENSIONS. TIMBERS WILL BE CUT TO VTW'S DIMENSIONS ONLY

General Notes:  
Timbers to be Douglas Fir #1 & Better S4S  
Pigs to be 1" birch.  
All edges to have 1/2" chamfer  
One coat of stain, oil or urethane to be shop applied on all sides.  
All Bolts to be 3/4" zinc coated Grade A307.  
All Steel A36 and to be shop primed flat black.


Authorization to Order Material And Fabricate

The undersigned certifies that all the dimensions shown on these drawings are correct and the material order and fabrication may proceed:

Wiles Architects	Date
Newfield Construction	Date
Sarazin General Contractors	Date

REVISIONS	BY
7/19/06	
9/6/06	

RED LINE CHECK  
BY: DATE:

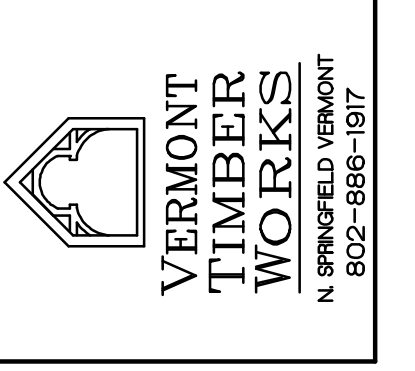

SHOP DRAWINGS  
Truss Profiles

PROJECT: Carl M. Small  
Regional Vocational Center  
Timber Frame Lobby

DRAWN : D.F.	CHECKED :
DATE : 6/21/06	
SCALE : 3/8"=1'-0"	
JOB NO. :	
SHEET	
F-2	
OF SHEETS	